



Datasheet

[Get a Quote](#)

Overview

S5720S-12TP-PWR-LI-AC is a Huawei S5700 Series switch, providing 8 Ethernet 10/100/1000 PoE+ ports, 2 Gig SFP and 2 dual-purpose 10/100/1000 or SFP, 124W PoE AC 110/220V.

Quick Specification


Model	S5720S-28P-LI-AC
Part Number	98010578
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Not supported
Weight with packaging [kg(lb)]	3.9 kg (8.6 lb)
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.8 mm (1.72 in. x 17.4 in. x 8.85 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 233.8 mm (1.72 in. x 17.4 in. x 9.21 in.)



Datasheet

Product Details:

Appearance:

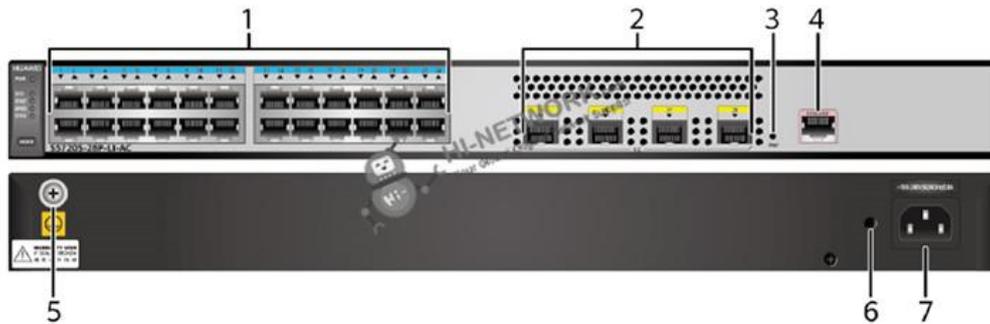

①	Twenty-four 10/100/1000BASE-T ports
②	Four 1000BASE-X ports
③	One PNP button
④	One console port
⑤	Ground screw
⑥	Jack for AC power cable locking strap
⑦	AC socket

Get more information:

Do you have any question about the S5720S-28P-LI-AC 98010578?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	98010578
Model	S5720S-28P-LI-AC
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	45 years
Mean time to repair (MTTR)	2
Availability	> 0.99999

Datasheet

Service port surge protection	Common mode: ± 7 kV
Power supply surge protection	± 6 kV in differential mode, ± 6 kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.8 mm (1.72 in. x 17.4 in. x 8.85 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 233.8 mm (1.72 in. x 17.4 in. x 9.21 in.)
Weight (with packaging)	3.9 kg (8.6 lb)
Stack ports	Twenty-four 10/100/1000BASE-T ports and four 1000BASE-X ports
RTC	Not supported
RPS	Not supported
PoE	Not supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput, full speed of fans)	20.2 W
Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> • Tested according to ATIS standard • EEE enabled • No PoE power consumption 	16.1 W
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature	-5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	Noise-free (no fans)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification

S5720S-28P-LI-AC (98010578)

Datasheet



Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223