

Datasheet

[Get a Quote](#)

Overview

S5720S-28P-PWR-LI-AC - Huawei S5700 Series Switches.S5720S-28P-PWR-LI-AC(24 Ethernet 10/100/1000 ports,4 Gig SFP,PoE+,370W POE AC 110/220V)


Quick Specification

| | |
|--------------------------------|---|
| Model | S5720S-28P-PWR-LI-AC |
| Part Number | 98010589 |
| Memory (RAM) | 512 MB |
| Flash | 512 MB in total. To view the available flash memory size, run the display version command. |
| PoE | Supported |
| Weight with packaging [kg(lb)] | 5.2 kg (11.45 lb) |
| Dimensions (H x W x D) | Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 314.8 mm (1.72 in. x 17.4 in. x 12.39 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 323.8 mm (1.72 in. x 17.4 in. x 12.75 in.) |

Datasheet

Product Details:

Appearance:

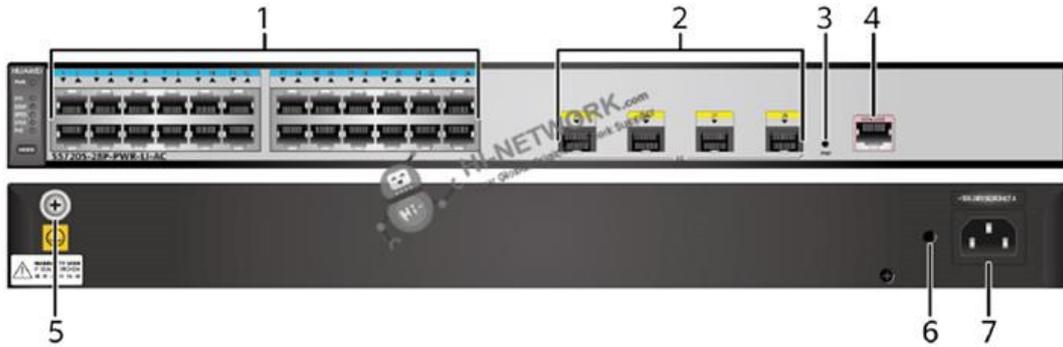

| | |
|---|--|
| ① | Twenty-four PoE+ 10/100/1000BASE-T ports |
| ② | Four 1000BASE-X ports |
| ③ | One PNP button |
| ④ | One console port |
| ⑤ | Ground screw |
| ⑥ | Jack for AC power cable locking strap |
| ⑦ | AC socket |

Get more information:

Do you have any question about the S5720S-28P-PWR-LI-AC 98010589?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

| | |
|-----------------------------------|--|
| Part Number | 98010589 |
| Model | S5720S-28P-PWR-LI-AC |
| Memory (RAM) | 512 MB |
| Flash | 512 MB in total. To view the available flash memory size, run the display version command. |
| Mean time between failures (MTBF) | 41 years |
| Mean time to repair (MTTR) | 2 |
| Availability | > 0.99999 |

Datasheet

| | |
|--|---|
| Service port surge protection | Common mode: ± 7 kV |
| Power supply surge protection | ± 6 kV in differential mode, ± 6 kV in common mode |
| Dimensions (H x W x D) | Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 314.8 mm (1.72 in. x 17.4 in. x 12.39 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 323.8 mm (1.72 in. x 17.4 in. x 12.75 in.) |
| Weight (with packaging) | 5.2 kg (11.45 lb) |
| Stack ports | Twenty-four 10/100/1000BASE-T ports and four 1000BASE-X ports |
| RTC | Not supported |
| RPS | Not supported |
| PoE | Supported |
| Rated voltage range | 100 V AC to 240 V AC, 50/60 Hz |
| Maximum voltage range | 90 V AC to 264 V AC, 47 Hz to 63 Hz |
| Maximum power consumption (100% throughput, full speed of fans) | Not providing the PoE function: 40.4 W 100% PoE loads: 446.7 W (system power consumption: 77.1 W, PoE: 369.6 W) |
| Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> • Tested according to ATIS standard • EEE enabled • No PoE power consumption | 26 W |
| Operating temperature | 0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.) |
| Short-term operating temperature | -5°C to +55°C (23°F to 131°F) at an altitude of 0-1800 m (0-5906 ft.) |
| Storage temperature | -40°C to +70°C (-40°F to +158°F) |
| Noise under normal temperature (27°C, sound power) | < 49.1 dB(A) |
| Relative humidity | 5% to 95%, noncondensing |
| Operating altitude | 0-5000 m (0-16404 ft.) |
| Certification | EMC certification Safety certification Manufacturing certification |

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223